


Component Selection Guide

Component Selection Table - Drexan offers 3 families of components

- **AMIGA**
Up to 3 heater cables with or without power
- **HeatShrink® Components (HS)**
- **Metallic Components**
(LP/HP - Low / High Profile)

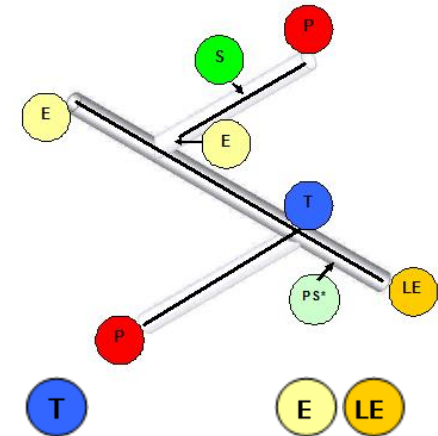

	P	PS	S	T	E LE
CABLE	POWER KIT	POWER SPLICE* (CENTER FEED)	CABLE SPLICE	CABLE TEE	END SEAL / LIGHTED END SEAL
MultiTrace® Ordinary area	AMIGA HS-PC	AMIGA	AMIGA HS-TSPLICE	AMIGA HS-TSPLICE	LP-E AL HS-ESK HP-LE-1R(2R)*
PipeGuard® Warm Ordinary and Hazloc†	AMIGA HS-PC LP-PC-1 AL HP-PC-1 AL	AMIGA LP-PC-2 AL LP-PCT-2 AL HP-PCT-2 AL	AMIGA HS-TSPLICE LP-S AL	AMIGA HS-TSPLICE LP-T-AL	HS-ESK LP-E AL HP-LE-1R(2R)*
PipeGuard® Hot Ordinary and Hazloc†	AMIGA LP-PC-1 AL HP-PC-1 AL	AMIGA LP-PC-2 AL LP-PCT-2 AL HP-PCT-2 AL	AMIGA LP-S AL	AMIGA LP-T-AL	HS-HT-E LP-E AL HP-LE-1R(2R)*
PipeGuard® CMH High Temperature Hazloc†	CMH-CON	CMH-CON	CMH-CON	CMH-CON	CMH-CON CMH-LE-1R(2R)*

• When using Power Splices, specify E or LE for end of heating cable runs
 * When using Lighted End Seals, specify 1R for 100-130V; 2R for 208-277V
 † For Class I Div 1 applications, contact Drexan Energy Systems